

## SPECIALTY OPTICAL FIBER

# IXF-SM-1550-125-014-HT

## Single Mode Fiber

The IXF-SM family regroups singlemode fibers designed for operation from UV to NIR wavelengths. Available with different cladding diameter, numerical aperture, and coating material, a wide range of singlemode fibers are available.

The IXF-SM-1550-125-014-HT fiber is designed for use in harsh environments with high temperatures and/or low to moderate radiation levels.



### Benefits & Features


- 1310 & 1550 nm singlemode operation
- Ø125 µm cladding diameter
- Low splice loss to SMF28
- High temperature acrylate coating
- Operation up to +125 °C
- Other diameters and coatings available upon request
- Matching radiation hardened fiber available

### Applications

- Sensing
- FBG inscription
- Distributed Temperature Sensing (DTS)
- Transport fiber

### Related Products

- IXF-RAD-SM-1550-014-HT Rad-Hard fiber
- IXF-SM-1550-125-014-PI NA 0.14, Polyimide
- IXF-SM-1550-125-0.12-PI NA 0.12, Polyimide

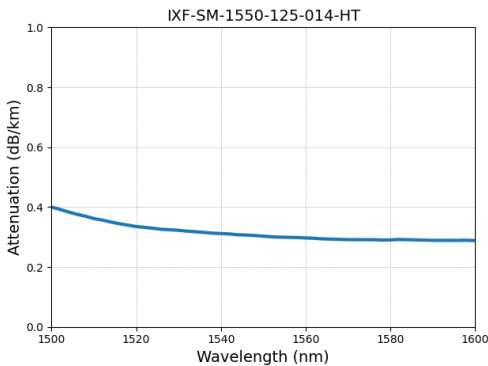

Typical attenuation spectrum of the IXF-SM-1550-125-014-HT fiber.

### Parameters

Cutoff wavelength (nm)	≤ 1275
Attenuation @1550 nm (dB/km)	≤ 0.4
Attenuation @1310 nm (dB/km)	≤ 0.6
Mode field diameter @1550 nm (µm)	8.5 ± 0.5
Mode field diameter @1310 nm (µm)	7.5 ± 0.5
Numerical aperture	0.14 ± 0.01
Core/Clad concentricity (µm)	≤ 1
Cladding diameter (µm)	125 ± 1
Coating diameter (µm)	245 ± 15
Proof test level (kpsi)	100

### Design parameters

Coating material	High-temperature acrylate
Operating temperature range (°C)	-60 to +150
Short term bend radius (mm)	≥ 10
Long term bend radius (mm)	≥ 20

Typical Radiation Induced Attenuation @1550 nm for 20 kGy (γ ray): 25 dB/km

Exail reserves the right to change, at any time and without notice, the specifications, design, function or form of its products described herein.

contact.photonics@exail.com | www.exail.com  
Europe +33 1 30 08 94 50 | Americas +1 508 745 3487 | APAC +60 11 1623 1698

**exail**