


FIBER BRAGG GRATING

IXC-CLFO-LN-1550-PM

Single Frequency DFB Laser

For distributed feedback single-frequency fiber laser

Exail's single-frequency fiber lasers are based on UV Bragg grating technology applied to active rare-earth photosensitive fibers. Ultra short cavity length and phase-shifted design permit ultra-narrow linewidth and robust mode-hop-free laser source properties, ideal for various sensor applications.



Benefits & Features

- Narrow-linewidth
- Single longitudinal mode
- Mode-hop-free
- Linear polarization
- Low intrinsic phase noise
- WDM compatible
- Low optical feedback sensitivity
- 125 or 80 µm clad diameter
- Wavelength range 1530 – 1590nm
- SMSR > 50 dB

Applications

- Acoustic sensing
- Hydrophone
- Cold atom
- Interferometry
- Spectroscopy

IXC-CLFO-LN-1550-PM


Single frequency DFB laser sub-assembly, with PM fiber access

TECHNICAL SPECIFICATIONS


Parameters (at 100 mW pump power, backward configuration)

Signal wavelength (ref. to vacuum, slow axis) (nm)	1550 ± 0.5 (other upon request) at 23°C
Pump wavelength (nm)	1480 (980 also acceptable)
Laser threshold (mW)	< 10
Laser power (μ W)	> 10
PER (linear polarization) (dB)	> 20
Linewidth (kHz)	< 10, typical
RIN peak value (dB/Hz)	< -60
Relaxation frequency (kHz)	> 100
Frequency noise (Hz ² /Hz)	< 30
Signal to noise ratio (dB)	> 50 (res. 50 pm)
Cavity length (mm)	35 to 55
Thermal sensitivity (pm/°C)	10, without packaging
Pigtail fiber type and length (m)	backward port PM 1550, 1 forward port Hi1060 Flex, 1

Pump configuration

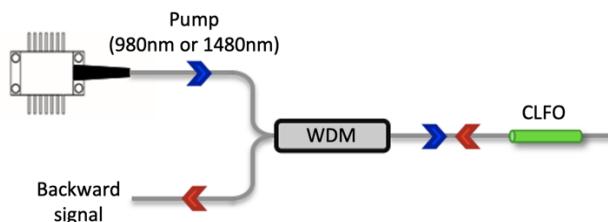

CLFO configuration

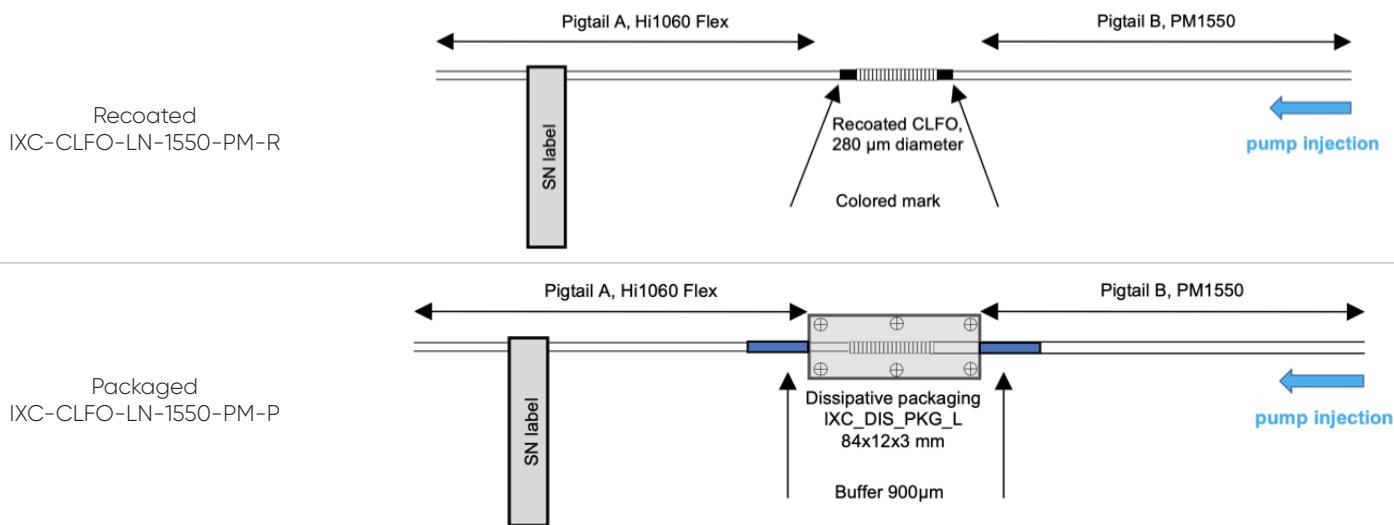

Exail reserves the right to change, at any time and without notice, the specifications, design, function or form of its products described herein.

contact.photonics@exail.com | www.exail.com

Europe +33 1 30 08 94 50 | Americas +1 508 745 3487 | APAC +60 11 1623 1698

exail