

FIBER BRAGG GRATING

# IXC-FBG-PS-1064-2-ATH-PM-FA

## Ultra-Narrow Band-Pass Filter

This filter type is based on a specific process using a phase-shifted (PS) technique. This phase-shifted is introduced to the refractive index modulation, leading to a narrow transmission peak within the stop-band.

The filter we propose is a customer inspired product with an original wavelength at 1064 nm and a band pass linewidth lower than 2 GHz.



Thermally packaged, this filter is very stable against temperature variations.

Additionally, the band-pass wavelength can be easily and finely adjusted by rotating a tiny screw on the package.

### Benefits & Features

- Ultra-narrow band-pass filter down to 2 GHz FWHM
- Tailored transmission
- Filtering at specific wavelength
- Low insertion loss
- High temperature stability within a 1 pm/°C
- $\pm 50$  pm fine tuning with our specific athermal package

### Applications

- Free-space quantum-key distribution (QKD)
- Laser communication
- Lidar
- Lines filtering for lasers and sensors
- Linewidth reduction
- Frequency conversion

# IXC-FBG-PS-1064-2-ATH-PM-FA

## Ultra-Narrow Bandwidth Band-Pass Filter

### TECHNICAL SPECIFICATIONS

#### Parameters

Band-pass center wavelength CW (nm) <sup>1</sup>	1064 ± 0.05
Band-pass bandwidth (FWHM) (GHz)	< 2
Rejection bandwidth $\Delta V_{-3dB}$ (GHz)	> 125
Insertion loss IL (dB) <sup>2</sup>	< 1
Out-of-band attenuation $\Delta T$ at ± 10 GHz (dB)	> 20
Tuning range (pm)	± 50
Tuning resolution (GHz)	1
CW thermal drift [- 5 ; 70]°C (pm)	< 150
Packaging (mm)	55 x 5 x 5
Input power (max.) (mW) <sup>3-4</sup>	300
Pigtail length (m)	1
Optical connectors CC	FC/APC (0.9 mm buffered fiber)

#### Comments:



<sup>1</sup> Referenced to vacuum at ± 0.05 nm, slow axis (PM fiber)

<sup>2</sup> By design

<sup>3</sup> Maximum input power: damage power threshold

<sup>4</sup> Recommended input power for stable filter operation is below 10 mW

#### Typical spectrum (measured in transmission)

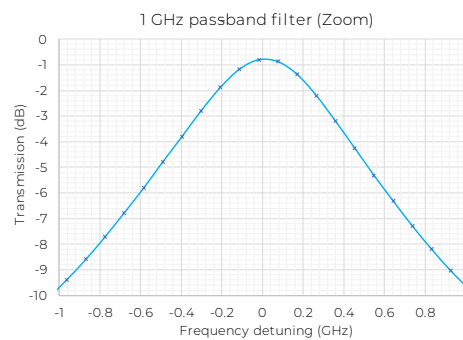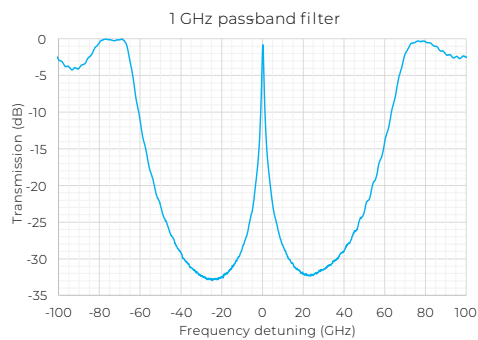

Exail reserves the right to change, at any time and without notice, the specifications, design, function or form of its products described herein.

contact.photonics@exail.com | www.exail.com  
 Europe +33 1 30 08 94 50 | Americas +1 508 745 3487 | APAC +60 11 1623 1698

**exail**