

SPECIALTY OPTICAL FIBER

IXF-ESM-10-125-VIS

Endlessly Single Mode Fiber – Visible


This fiber displays an endlessly single mode behavior with lower photodarkening in the visible range due to the nature of its specific silica. The high OH content of the UV grade silica confers to this fiber excellent transmission resistance against radiation and high power visible light. This fiber is therefore ideally suited for excellent mode delivery in the visible.



Partnership with **PHOTONICS BRETAGNE**
Product line **PERFUS**

Benefits & Features


- Singlemode over the whole wavelength range
- Visible-Grade silica

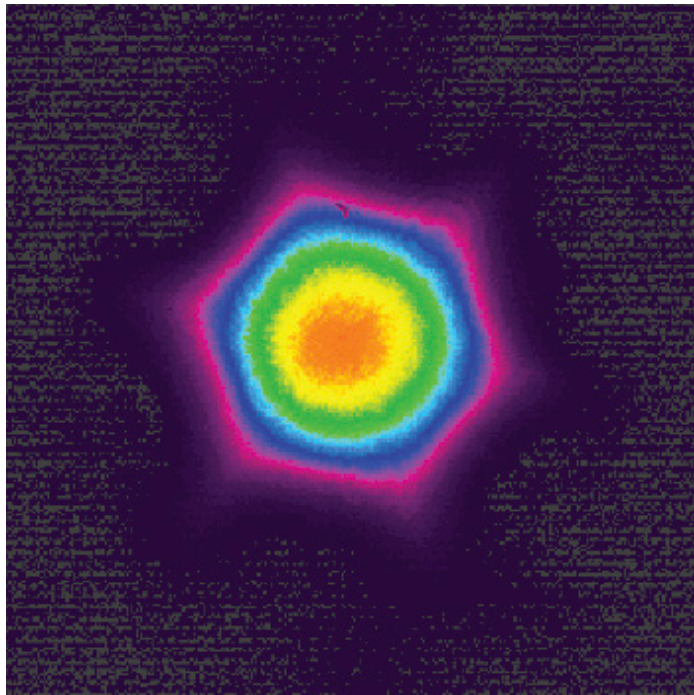

Measured fundamental mode shape @ 375 nm

Applications

- Singlemode delivery in the visible spectral range

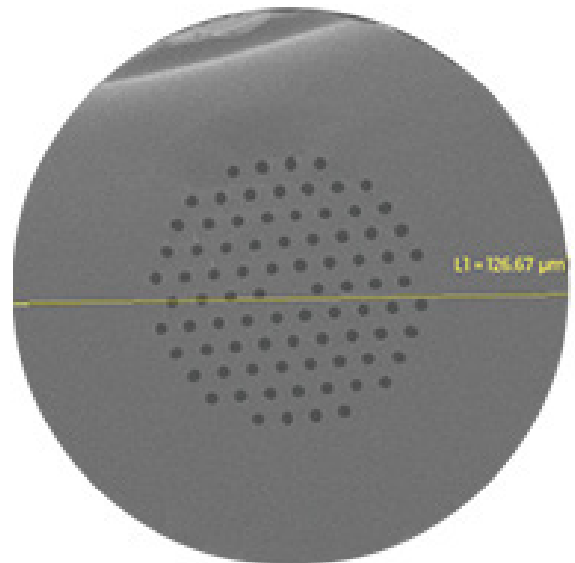

PSD-L-Q-E-086 L



IXF-ESM-10-125-VIS-edB_05022021

IXF-ESM-10-125-VIS

TECHNICAL SPECIFICATIONS

Parameters

Material	UV grade silica
OH content (ppm)	400
Core diameter (μm)	10.5 ± 0.5
Cladding diameter (μm)	126 ± 3
Coating outside diameter (μm)	248 ± 5
Coating type	dual coat high index acrylate
Numerical aperture @ 780 nm	0.11 ± 0.01
LP ₁₁ cut-off wavelength (nm)	none
Background loss @ 400 nm (dB/km)	< 300
Background loss @ 532 nm (dB/km)	< 35
Background loss @ 780 nm (dB/km)	< 35
Background loss @ 1060 nm (dB/km)	< 20
Mode Field diameter @ 780 nm (μm)	7 ± 0.5
Effective area @ 780 nm (μm^2)	35 ± 10
Proof test (kpsi)	20

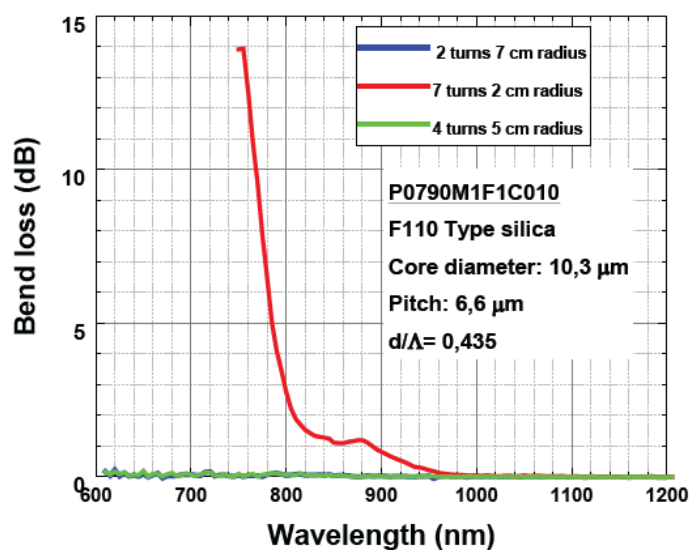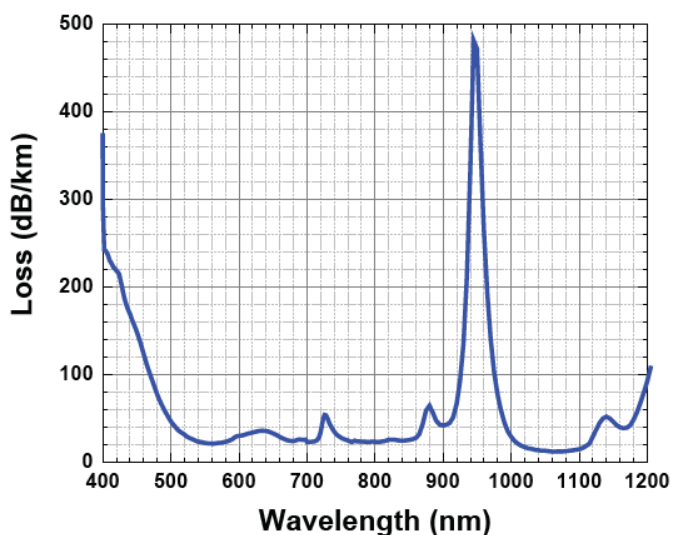

Typical measured fibre attenuation and bend loss sensitivity

Exail reserves the right to change, at any time and without notice, the specifications, design, function or form of its products described herein.

contact.photonics@exail.com | www.exail.com
Europe +33 1 30 08 94 50 | Americas +1 508 745 3487 | APAC +60 11 1623 1698

exail